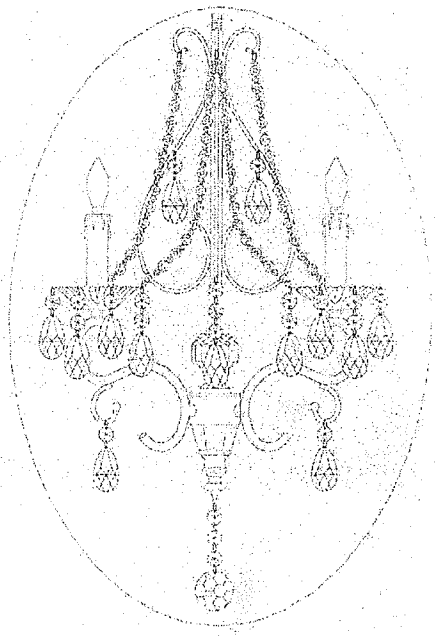

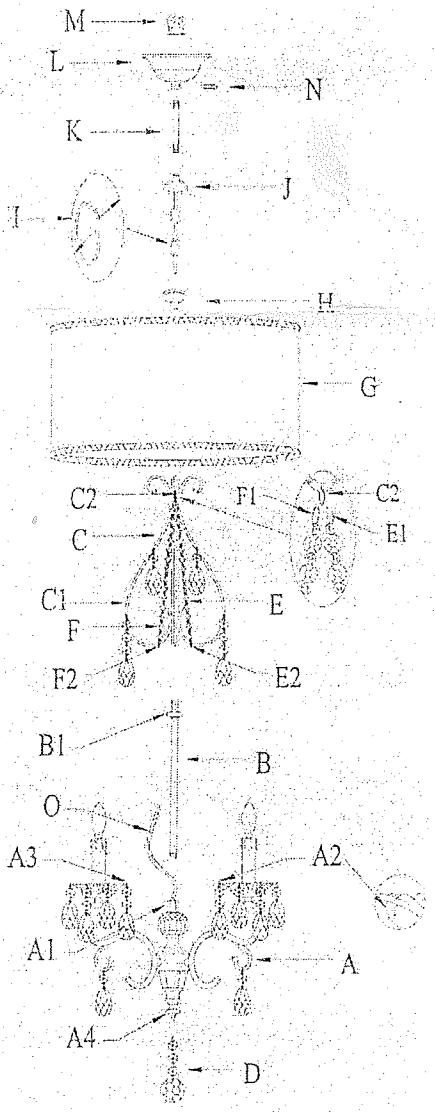


# OK-5109H

## ASSEMBLY INSTRUCTION

1. INDOOR USE ONLY
2. REPLACE THE BULB AFTER THE BULB GETS COOL.

Assembly steps:

Step 1.Hang bead string (D) ,put the ring into the hole (A4).

Step 2.Pass the main wire(O)through the tube(B)

Step 3. Turn tube(B) into the assemble (A1) , Take out the nut (B1) , put the assembly (C) over the tube(B), and secure with the nut(B1), turn the assembly (C) in the proportion position.

Step 4. Hang bead string(F ), put the ring(F1) into the ring (C2), put the ring(F2) into the ring (A3). Hang bead string (E), put the ring(E1) into the ring(C2), put the ring(E2) into the ring (A2).

**Folow the same method as step 4 to hang all the bead strings (total 12pcs)**

Step 5. Mount the shade (G) to the tube(B) and secure with loop(H). Turn in the bulbs to the socket.

**Step 6. Mount ceiling fitting**

Step6-1.Tighten loop(J)on the tube(K).

Step6-2.Loosen screw(N)and pass canopy (L) over the tube (K).

Step 6-3.Tighten loop(M) on the tube(K).

Step 6-4. pass the main wire(O)through the links of chain(I),loop(J),canopy(L), tube(K)and loop(M).

Step 6-5.Open and attach first link and last link of chain(I)to the loops(H) and(J),and use pliers to close the links of chain.

Step 6-6. Connect wire(O)to the power supply cord.

Step 6-7. raise the canopy(L)to ceiling and secure it by tightening the screw(N).

Step 6-8. Hang the Loop(M)on the hook on ceiling.

After completed the above instruction, please check once more to ensure its safety. Then you may turn the power on. If the external cable or cord is damaged it shall be replaced exclusively by the manufacturer or service agent or similar qualified person to avoid hazard.